



BOSCH



PROFESSIONAL POWER TOOLS

Product Catalogue

6 YEARS

**Tool & Battery
Guarantee***

*With online registration

18V HIGH PERFO



BITURBO

BRUSHLESS

**HIGH PERFORMANCE
BRUSHLESS MOTOR**



**ProCORE 18V
BATTERIES**

18V BITURBO Brushless Range



GBH 18V-34 CF



GBH 18V-36 C



GBH 18V-45 C



GDS 18V-1000
1/2"



GDS 18V-1050
3/4"



GDS 18V-1000 C
1/2"



GDS 18V-1050 HC
3/4"



GDS 18V-1600 HC



GWS 18V-15 C



GWS 18V-15 SC



GWS 18V-15 P



GWS 18V-15 PSC



GWX 18V-15 C



GWX 18V-15 PSC



GWS 18V-180 P

PERFORMANCE TOOLS



View our whole
BITURBO Range



2000W OF CORDED POWER

Backwards Compatible To ALL Bosch 18V Batteries



GSB 18V-150 C



GBL 18V-750



GSA 18V-28



GNB 18V-38



GKS 18V-68 C



GKS 18V-68 GC



GKT 18V-52 GC



GCM 18V-216 D



GCM 18V-216 DC



GCM 18V-305 GDC



GTS 18V-216



GAS 18V-12 M



GRA 18V2-46

**PLUS
MORE**



HEALTH AND SAFE

**YOUR PEOPLE ARE YOUR BIGGEST ASSET,
GIVE THEM THE BEST PROTECTION.**



Kickback Control from Bosch is now found on our angle grinders, drills and rotary hammers. Bosch sensor based protection system detects in seconds a kickback situation and shuts the tool down, immediately protecting the user.



Vibration Control reduces vibration by up to 60% lowering fatigue and the risk to the user. The long term effects of vibration such as white knuckle disease are also reduced.



Stops accidental restart if the power is disconnected then reconnected, protecting users from potential injury hazard.



Drop Control now senses when a tool is dropped with the switch engaged and immediately shuts the tools off.



Protection Guard's on our Bosch angle grinders reduce shattered discs and sparks aiming in the direction of the user while in use.



Protection Switch (Deadman Switch) shuts the tool off when the switch is released.



Brakes the motor of the tool in 1-3 seconds depending on the tool. Bosch X-LOCK tool-less disc change for angle grinders delivers 1 sec braking times. Available on 18V and 240V angle grinders with this symbol.



SAFETY WITH BOSCH



Remove Silica Dust at the source.

Silica Dust and its control is a high priority for working safely on site. Bosch Power Tools offer one of the industries best ranges in silica control products available.

Full range of M and H class vacuums, attachments and accessories.



OTHER SAFETY FEATURES:



Find your
Dust Solutions



BOSCH ONSITE TEAM

Bosch ONSITE Solutions are a dedicated team engaging companies and projects directly on site across Australia and New Zealand. Our target is to deliver ZERO Downtime solutions for our users by providing products, services and solutions to increase user safety, maximise productivity and deliver greater asset ROI. Our team work with you, directly on site, to customise a solution for your project and company.

Our national team work across all industries including Mining, Construction, Transport, Energy and Manufacturing. Our process starts with a site and asset review which allows us to provide tailored solutions matched to your requirements. As one of the first Carbon Neutral companies in the world Bosch can take you one step closer to achieving your sustainability goals.

Book in a site visit from our ONSITE Solutions team and discover how we can assist you to improve safety and productivity on your site or project.



MINING



MANUFACTURING



CIVIL AND INFRASTRUCTURE



TRANSPORT AND UTILITIES



CONSTRUCTION



ENERGY



GOVERNMENT AND COUNCIL



TRAINING ORGANISATIONS

THE BOSCH

Our products and services are designed to spark enthusiasm, improve quality of life, and help conserve natural resources. We want to deliver top quality and reliability. In short: we want to create technology that is 'Invented for life.'

**427,600 associates*,
91.6 billion
euros* in sales.**



**468
subsidiary
companies in 60 countries.***

*Information collected from end of year results in 2023.

OUR VALUES

- ▶ Future and result focus
- ▶ Fairness
- ▶ Responsibility and sustainability
- ▶ Reliability, credibility, legality
- ▶ Initiative and determination
- ▶ Diversity
- ▶ Openness and trust

GROUP

**OVER 136 YEARS
OF INNOVATION**

CO₂
neutral since 2020

Bosch is the first major industrial company to have attained CO₂ neutrality (in Scope 1 & 2) at its 400 sites.

But at Bosch, climate protection goes even further...

4 levers to achieve this goal:

- ▶ energy efficiency was increased
- ▶ the energy supply from renewable sources was expanded
- ▶ the purchase of green electricity was increased
- ▶ all unavoidable CO₂ emissions are offset with climate compensation measures

SUSTAINABILITY

Bosch plays a pioneering role in climate action – out of conviction and out of a sense of responsibility for society. Bosch has set itself clear sustainability targets with its 'New Dimensions – Sustainability 2025' target vision.

Learn more about
Sustainability at Bosch
**[bosch.com/sustainability/
sustainability-strategy](https://www.bosch.com/sustainability/sustainability-strategy)**



**94% of profits donated
to the Robert Bosch
Stiftung Foundation.**

ROBERT BOSCH STIFTUNG FOUNDATION

Through the Robert Bosch Stiftung (foundation), founded in 1964 on behalf of the will of Robert Bosch, our profits are used to benefit society, the environment and future generations - sustainably and for the long-term. In his legacy Robert Bosch determined that 'apart from the alleviation of all kinds of hardship, [...] the moral, physical and intellectual development of the people' shall be promoted by the profits of his assets.

To learn more about the Robert Bosch Stiftung Foundation go to: **[www.bosch-stiftung.de/
en/who-we-are](https://www.bosch-stiftung.de/en/who-we-are)**

Find out more about the Bosch Group

<https://www.bosch.com/company/>





6 YEARS

**Tool & Battery
Guarantee***

*With online registration

PROFESSIONAL 18V SYSTEM

**ULTIMATE PERFORMANCE.
120+ 18V TOOLS.**



12	Combo Kits	34	Nailer / Stapler
14	Batteries	35	Concrete Nailer
15	Chargers	36	Caulking Gun / Heat Gun / Rivet Gun
16	Starter kits	37	Blower/ Dust Extractors
18	Hammer drills	38	Bluetooth Radio
19	Rotary hammers	39	Worklight / Tripods
21	Screwdriver / Impact Driver	40	Outdoor Power Equipment
22	Dual Impact Driver & Wrenches	42	Heated Clothing
23	Impact Wrenches		
24	X-LOCK Angle Grinders		
28	Straight Grinder / Nibbler / Shear / Drywall / Band Saws		
29	Circular Saws		
30	Saw		
32	Jigsaw / Orbital Sanders		
33	Recip Saws/ Multi-Tool / Planer		

18V SYSTEM

2 Piece 4.0Ah Brushless Combo Kit



Part Number	0 615 991 FH5
60Nm Hammer Drill	GSB 18V-60
200Nm Impact Driver & ½" Wrench	GDX 18V-200
2x 4.0Ah Batteries	GBA 18V 4.0Ah
18V Charger	GAL 18V-40
Tool Bag	Tool Bag



2 Piece 8.0Ah Brushless ProCORE18V Combo Kit



Part Number	0 615 990 L24
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & ½" Wrench	GDX 18V-200 C
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V Charger	GAL 1880 CV
Hard case	L-BOXX 136



3 Piece 8.0Ah Brushless ProCORE18V Combo Kit



Part Number	0 615 990 L27
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & ½" Wrench	GDX 18V-200 C
125mm Side Switch Angle Grinder	GWS 18V-10
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V Charger	GAL 1880 CV
Tool Bag	Medium Tool Bag



4 Piece 5.0Ah Brushless Combo Kit



Part Number	0 615 990 M19
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & ½" Wrench	GDX 18V-200
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
2x 5.0Ah Batteries	GBA 18V 5.0Ah
18V Charger	GAL 18V-40
Tool Bag	Tool Bag



5 Piece 5.0Ah Brushless Combo Kit



Part Number	0 615 990 N3D
110Nm Hammer Drill	GSB 18V-85 C
210Nm Impact Driver & ½" Wrench	GDX 18V-210 C
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
165mm Circular Saw	GKS 18V-57-2
2x 5.0Ah Lithium-Ion 18V Batteries	GBA 5.0Ah 18V
18V Charger	GAL 18V-40
Tool Bag	Tool Bag

5 Piece 8.0Ah Brushless ProCORE18V Combo Kit



Part Number	0 615 990 M70
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & ½" Wrench	GDX 18V-200
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
184mm Circular Saw	GKS 18V-68 C
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V Charger	GAL 1880 CV
Tool Bag	Tool Bag

6 Piece 8.0Ah Brushless ProCORE18V Combo Kit



Part Number	0 615 990 L26
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & ½" Wrench	GDX 18V-200 C
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
Recip Saw	GSA 18V-32
1900 Lumen Worklight	GLI 18V-1900
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V Charger	GAL 1880 CV
Tool Bag	Tool Bag



For more information & kits visit our websites at AUS: bosch-pt.com.au/au/en/ NZ: bosch-pt.co.nz/nz/en/

ProCORE 18V

Up to

2,000W

of power when
paired with

BITURBO
BRUSHLESS

Packed with advanced 21700
cell technology delivering
2x THE POWER*



*Compared standard Bosch Batteries

With Coolpack 2.0 get
2x THE LIFETIME*



*Compared standard Bosch Batteries

4.0Ah

Power without the weight

Part number 1 600 A01 6GB

Weight 515 g



8.0Ah

Twice the runtime

Part number 1 600 A01 6GK

Weight 955 g



12.0Ah

Power to run all day

Part number 1 600 A01 6GU

Weight 1.35 g



TWIN PACKS

2 x 4.0Ah

Part number 0 615 990 M5K



2 x 8.0Ah

Part number 0 615 990 M2E



2 x 12.0Ah

Part number 0 615 990 M5L



VALUE PACKS

2 x 4.0Ah

Part number 0 615 990 M5M



4 x 8.0Ah

Part number 0 615 990 M5P



6 YEARS

**Tool & Battery
Guarantee***

*With online registration

18V SYSTEM

18V 4.0Ah Battery



Technical data	GBA 18V 4.0Ah
Part number	1 600 A00 163
Battery voltage	18V
Weight	610 g

18V 5.0Ah Battery



Technical data	GBA 18V 5.0Ah
Part number	1 600 A00 129
Battery voltage	18V
Weight	620 g
Technical data	2 x GBA 18V 5.0Ah Twin Pack
Part number	0 615 990 M5J
Technical data	6 x GBA 18V 5.0Ah Value Pack with L-BOXX
Part number	0 615 990 M5N

18V 4.0A Charger



Technical data	GAL 18V-40
Part number	1 600 A01 9RN
Battery charging voltage	14,4 – 18V
Weight	550 g
Charge rate (per hour)	4.0 A

18V 8.0A Fast Charger



Technical data	GAL 1880 CV
Part number	1 600 A00 N5M
Battery charging voltage	18V
Weight	950 g
Charge rate (per hour)	8.0 A

Ultra Fast Charger



Technical data	GAL 18V-160
Part number	1 600 A02 T5L
Battery charging voltage	14,4 – 18V
Weight	950 g
Charge rate (per hour)	16.0 A

16.0
A



16.0 A Charging

50% charge in 9 mins.*
=Less Down Time



Active Air Cooling

Prolongs battery life and
charges faster.

*Based on 4 Ah ProCORE battery

18V 8.0A 6-Bay Charger



Technical data	GAL 18V 6-80
Part number	1 600 A01 U9P
Battery charging voltage	18V
Weight	1.8 kg
Charge rate (per hour)	8.0 A

Battery Adaptor & USB Charger



Technical data	GAA 18V-24
Part number	1 600 A00 J61
Battery charging voltage	18V
Weight	125 g

18V SYSTEM

18V 4.0Ah + Charger

1 600 A01 BA2



18V 5.0Ah + Charger

0 615 990 M1Z



18V Twin 5.0Ah + Charger

0 615 990 M20



ProCORE18V 4.0Ah + Charger

0 615 990 L5V



ProCORE18V 8.0Ah + Fast Charger

0 615 990 L5U







ProCORE18V 12.0Ah + Ultra Fast Charger

1 600 A02 T5Z



18V Charging time standard batteries

		POWER BOOST MODE				STANDARD MODE					
		4Ah	8Ah	4Ah	8Ah	4Ah	8Ah	12Ah	4Ah	8Ah	12Ah
		50% 80%	50% 80%	80% 100%	80% 100%	80% 100%	80% 100%	80% 100%	80% 100%	80% 100%	80% 100%
GAL 18V-160 Ultra-fast charger		9	21	15	26	21	35	26	44	36	55
GAL 18V6-80 Fast charger		-	-	-	-	32	50	42	68	65	96
GAL 1880 CV Fast charger		-	-	-	-	32	51	68	79	113	126
GAL 18V-40 Compact charger		-	-	-	-	48	65	113	124	162	172

COMING SOON

PRO CORE18V+

18V TABLESS CELL TECHNOLOGY

LONGEST RUNTIME

71% longer runtime
in heavy duty
application
compared to Bosch
8.0Ah ProCORE18V

LONGEST LIFETIME


Less internal heat
resistance paired
with outstanding
heat management.



MOST POWERFUL

Delivers power
faster and
more efficiently
to the tool.

Scan here to
learn more



18V SYSTEM

55Nm Brushless Hammer Drill

Battery not included



Technical data	GSB 18V-55
Part number	0 615 990 M1Y
Torque (soft/hard/max.)	55 Nm
No-load speed (1st gear / 2nd gear)	0 – 460 / 0 – 1,800 rpm
Max. screw diameter	8 mm
Max. drilling diameter in wood	35 mm
Max. drilling diameter in masonry	13 mm
Max. drilling diameter in steel	13 mm
1 Piece Kit	0 615 990 J4J
2 x 4.0Ah Batteries, GAL 18V-40 Charger, Tool bag	
1 Piece Kit	0615 990 M5B
1 x 5.0Ah Battery, GAL 18V-40 Charger	

60Nm Brushless Hammer Drill

Battery not included



Technical data	GSB 18V-60 C
Part number	0 615 990 J9U
Torque	31-60 Nm
No-load speed (1st gear / 2nd gear)	0 – 600 / 0 – 1,900 rpm
Max. screw diameter	10 mm
Max. drilling diameter in wood	38 mm
Max. drilling diameter in masonry	13 mm
Max. drilling diameter in steel	13 mm

110Nm Brushless Hammer Drill

Battery not included



Technical data	GSB 18V-110 C
Part number	0 615 990 J9S
Torque (soft / hard / max)	47 / 85 / 110 Nm
No-load speed (1st gear / 2nd gear)	0 – 480 / 0 – 2,100 rpm
Max. screw diameter	12 mm
Max. drilling diameter in wood	82 mm
Max. drilling diameter in masonry	16 mm
Max. drilling diameter in steel	13 mm
1 Piece Kit	0 615 990 N23
1 x 5.0Ah battery, GAL 18V-40 Charger	

EXPERT ACCESSORY RANGE

BOSCH Expert Self Cut Speed Spade Bit



Scan to view the full range



150Nm Brushless Hammer Drill

Battery not included

BITURBO
BRUSHLESS



Technical data	GSB 18V-150 C
Part number	0 601 9J5 101
Torque (soft / hard / max)	84 / 100 / 150 Nm
No-load speed (1st gear / 2nd gear)	0 – 550 / 0 – 2,200 rpm
Max. screw diameter	12 mm
Max. drilling diameter in wood	150 mm
Max. drilling diameter in masonry	20 mm
Max. drilling diameter in steel	16 mm

NEW!



Electronic Angle Detection

A slope angle can be preselected that the tool then detects during work and displays to the user.

18V SYSTEM

22mm Brushless SDS+ Rotary hammer

Battery and filter attachment not included



Technical data	GBH 18V-22
Part number	0 611 924 000
Drilling dia. in concrete with hammer drill bits	22 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	20 mm
Max. impact energy	1.9 J
Rated speed	0 – 1,050 rpm
Impact rate at rated speed	0 – 4,675 bpm
Tool holder	SDS plus
10mm Dust Extractor	GDE 18V-12
Part number	1 600 A02 8H6

26mm Brushless SDS+ Rotary hammer

Battery and filter attachment not included



Technical data	GBH 18V-26
Part number	0 611 909 000
Drilling dia. in concrete with hammer drill bits	26 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	2.6 J
Rated speed	0 – 980 rpm
Impact rate at rated speed	0 – 4,350 bpm
Tool holder	SDS plus

F model comes complete with

Technical data	GBH 18V-26 F
Part number	0 611 910 000
SDS plus quick-change chuck (2 608 572 213)	x
Quick change chuck 13 mm (2 608 572 212)	x
16mm Dust Extractor	GDE 18V-16
Part number	1 600 A00 51M

26mm Brushless SDS+ Rotary hammer

Battery and filter attachment not included



Technical data	GBH 18V-26 D
Part number	0 611 916 040
Drilling dia. in concrete with hammer drill bits	26 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	2.5 J
Rated speed	0 – 980 rpm
Impact rate at rated speed	0 – 4,350 bpm
Tool holder	SDS plus
26mm Dust Extractor	GDE 18V-26 D
Part number	1 600 A01 TX0

28mm Brushless SDS+ Rotary hammer

Battery and filter attachment not included



Technical data	GBH 18V-28 DC
Part number	0 611 919 040
Max. drilling diameter concrete	28 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	3.4 J
Rated speed	0 – 950 rpm
Impact rate at rated speed	0 – 4,250 bpm
Tool holder	SDS plus
28mm Dust Extractor	GDE 18V-28 D
Part number	1 600 A02 1BH

COMING SOON

SDS CLEAN

Highly efficient dust removal at the source

Up to 25 x dust reduction compared to having no dust extraction.

4-Cutter full carbide head

Punches through reinforced concrete and avoids jamming.



18V SYSTEM

34mm Brushless SDS+ Rotary hammer

Battery not included

BITURBO
BRUSHLESS



Technical data	GBH 18V-34 F
Part number	0 611 914 041
Equivalent corded input power	950 W
Possible drilling diameter (Concrete)	6 – 32 mm
Optimal drilling diameter (Concrete)	12 – 30 mm
Max. impact energy	5.8 J
Rated speed	500 rpm
Impact rate	2,900 bpm
Tool holder	SDS plus



36mm Brushless SDS Max Rotary hammer

Battery not included

BITURBO
BRUSHLESS



Technical data	GBH 18V-36 C
Part number	0 611 915 041
Equivalent corded input power	1000 W
Possible drilling diameter (Concrete)	12 – 40 mm
Optimal drilling diameter (Concrete)	16 – 32 mm
Max. impact energy	7.5 J
Rated speed	500 rpm
Impact rate	2,900 bpm
Tool holder	SDS Max & Quick change



45mm Brushless SDS Max Rotary hammer

Battery not included

BITURBO
BRUSHLESS



Technical data	GBH 18V-45 C
Part number	0 611 913 040
Equivalent corded input power	1500 W
Possible drilling diameter (Concrete)	12 – 45 mm
Optimal drilling diameter (Concrete)	20 – 40 mm
Max. impact energy	12.5 J
Rated speed	0 – 305 rpm
Impact Rate (drilling / chiselling)	2,720 / 2,760 bpm
Tool holder	SDS Max



CORDED POWER WITH CORDLESS FREEDOM.

18V SYSTEM

Brushless Drywall Screwdriver

NEW!

Battery not included



Includes



Technical data	GTB 18V-45 + GMA 55
Part number	0 601 9K7 005
Battery voltage	18V
Torque	6 Nm
No-load speed	0 – 4,500 rpm
Max. screw diameter	6 mm

Accessory included

Technical data	GMA 55 Collated feed attachment
Part number	1 600 A02 5GD
Self-drilling screw diameter	5 mm

Comes complete with

1 x screwdriver bit PH 2	2 608 522 068
1 Piece Kit	0 601 9K7 041

2 x 5.0Ah, GAL 18V-40 charger, hard case



200Nm Brushless Impact Driver

Battery not included



Technical data	GDR 18V-200
Part number	0 615 990 M1W
Torque	200 Nm
Screw diameter	M 6 – M 16
No-load speed	0 – 3,400 rpm
Impact rate	0 – 4,000 bpm
Tool holder	1/4" internal hexagon

1 Piece Kit	0 615 990 M58
-------------	---------------

1 x 5.0Ah and GAL 18V-40 Charger



210Nm Brushless Impact Driver

Battery not included



Technical data	GDR 18V-210 C
Part number	0 615 990 N1P
Torque	210 Nm
Screw diameter	M 6 – M 16
No-load speed (1st / 2nd / 3rd)	0 – 1,100 rpm / 0 – 2,300 rpm / 0 – 3,400 rpm
Impact rate	0 – 2,200 / 3,300 / 4,100 bpm
Tool holder	1/4" internal hexagon



10x LONGER LIFE.

Impact tough screwdriver bits
+ a customisable case system.



18V SYSTEM

DUAL IMPACT DRIVER & WRENCH

WORLD'S FIRST



200Nm Brushless Impact Driver & Wrench

Battery not included



2IN1

Technical data	GDH 18V-200
Part number	0 615 990 M1X
Torque	200 Nm
Screw diameter	M 6 – M 16
No-load speed	0 – 3,400 rpm
Impact rate	0 – 4,200 bpm
Tool holder	1/4" internal hexagon and 1/2" external square

210Nm Brushless Impact Driver & Wrench

Battery not included



2IN1

Technical data	GDH 18V-210 C
Part number	0 615 990 N1R
Tightening Torque / Breakaway Torque	210 / 370 Nm
Screw diameter	M 6 – M 16
No-load speed	0 – 1,100 / 2,300 / 3,400 rpm
Impact rate	0 – 2,200 / 3,100 / 4,100 bpm
Tool holder	1/4" internal hexagon and 1/2" external square

18V SYSTEM

330Nm Brushless Impact Wrench

Battery not included



Technical data	GDS 18V-330 HC
Part number	0 601 9L5 000
Tightening Torque / Breakaway Torque	330 / 560 Nm
Screw diameter	M 10 – M 18
No-load speed	0 – 1,200 / 1,900 / 2,800 rpm
Impact rate	0 – 2,400 / 3,100 / 3,800 bpm
Tool holder	½" external square friction ring + through hole

1 Piece Kit 0 601 9L5 041

2 x GBA 18V 5.0Ah Batteries, GAL18V-40 Charger

450Nm Impact Wrench

Battery not included



Technical data	GDS 450 HC
Part number	0 601 9K4 000
Tightening Torque / Breakaway Torque	450 Nm / 800 Nm
Screw diameter	M 10 - M 20
No-load speed	0 – 1,000 / 1,500 / 2,300
Impact rate	0 – 1,900 / 2,500 / 3,300
Tool holder	½" friction ring + thru hole or ½" pin detent

1 Piece Kit 0 601 9K4 041

2 x GBA 18V 5.0Ah Batteries, GAL18V-40 Charger

NEW!

1000Nm ½" Brushless Impact Wrench

Battery not included

BITURBO
BRUSHLESS



Technical data	GDS 18V-1000 ½"
Part number	0 601 9J8 300
Tightening Torque / Breakaway Torque	1000 / 1600 Nm
Speed settings	3
No-load speed	0 – 880 / 1,170 / 1,750 rpm
Impact rate	0 – 1,760 / 2,340 / 2,600 bpm
Tool holder	½" Friction ring
Comes complete with	0 601 9J8 301
L-BOXX 136 (1 600 A00 1RR)	x
Comes complete with	0 601 9J8 300
Carton	x
Comes complete with	0 601 9JB 000
Connected version	x

1 Piece Kit 0 615 990 M65

2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case

1050Nm ¾" Brushless Impact Wrench

Battery not included

BITURBO
BRUSHLESS



Technical data	GDS 18V-1050 ¾"
Part number	0 601 9J8 500
Tightening Torque / Breakaway Torque	1050 / 1700 Nm
Speed settings	3
No-load speed	0 – 880 / 1,170 / 1,750 rpm
Impact rate	0 – 1,760 / 2,340 / 2,600 bpm
Tool holder	¾" Friction ring + thru hole
Comes complete with	0 601 9J8 501
L-BOXX 136 (1 600 A00 1RR)	x
Comes complete with	0 601 9J8 500
Carton	x
Comes complete with	0 601 9J8 200
Connected version	x

1 Piece Kit 0 615 990 M67

2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case

1600Nm ¾" Brushless Impact Wrench

Battery not included

BITURBO
BRUSHLESS



NEW!

Technical data	GDS 18V-1600 HC ¾"
Part number	0 601 9M1 000
Tightening Torque / Breakaway Torque	1600 / 2200 Nm
Screw diameter	M 16 – M 33
No-load speed	0 – 800 / 1,300 / 1,750 rpm
Impact rate	0 – 1,550 / 2,200 / 2,350 bpm
Tool holder	¾" Friction ring + through hole
Comes complete with	0 601 9M1 000
Carton	x

1 Piece Kit 0 601 9M1 041

2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case

2200Nm BREAKAWAY TORQUE



18V SYSTEM

125mm Side Switch X-LOCK Grinder

Battery not included



X-LOCK



Technical data	GWX 18V-7
Part number	0 601 9H9 101
No-load speed	11,000
Grinding/cutting disc, diameter	125 mm
Comes complete with	
Carton	x
Auxiliary handle (1 602 025 024)	x

125mm Brushless Side Switch X-LOCK Grinder

Battery not included



X-LOCK



Technical data	GWX 18V-10
Part number	0 601 7B0 101
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Comes complete with	0 601 7B0 101
L-BOXX 136 (1 600 A00 1RR)	x
Comes complete with	0 601 7B0 100
Carton	x

125mm Brushless Side Switch X-LOCK Grinder

Battery not included



X-LOCK



Technical data	GWX 18V-10 C
Part number	0 601 7B0 200
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
1 Piece Kit	0 615 990 M0H

2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case

125mm Brushless Paddle Switch X-LOCK Grinder

Battery not included



X-LOCK



Technical data	GWX 18V-10 PC
Part number	0 601 7B0 700
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
1 Piece Kit	0 615 990 M0J

2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case

125mm Brushless Paddle Switch X-LOCK Grinder

Battery not included



X-LOCK



Technical data	GWX 18V-10 PSC
Part number	0 601 7B0 800
No-load speed	4,500 – 9,000 rpm
Grinding/cutting disc, diameter	125 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
1 Piece Kit	0 615 990 M0G

2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case

125mm Brushless Side Switch X-LOCK Grinder

Battery not included

X-LOCK
BITURBO
BRUSHLESS



Technical data	GWX 18V-15 C
Part number	0 601 9H6 400
No-load speed	9,800 rpm
Grinding/cutting disc, diameter	125 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

125mm Brushless Paddle Switch X-LOCK Grinder

Battery not included

X-LOCK

BITURBO
BRUSHLESS



NEW!

Technical data	GWX 18V-15 PSC
Part number	0601 79H6 G00
No-load speed	3,400 - 9,800 rpm
Grinding/cutting disc, diameter	125 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x



XLOCK



The ultimate quick-change system for Angle Grinders.

XTRA SAFE


Rapid stop X-BRAKE. No incorrect mounting.

XTRA FAST

5x Faster accessory change.

XTRA EASY

Click disc on. Pull lever to release.

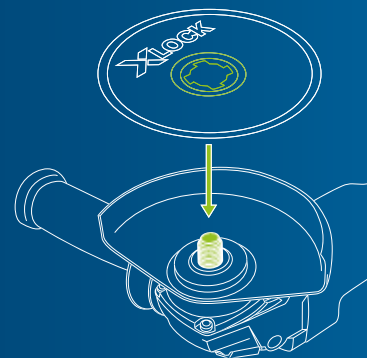

UNIVERSAL FIT

Cutting, grinding, diamond

CLICK IN. CLICK OUT.



40+ Global Brands on XLOCK
150+ Bosch Accessories available



18V SYSTEM

125mm Brushless Side Switch Grinder

Battery not included



700
W
EQUIVALENT

Technical data	GWS 18V-7
Part number	0 601 9H9 001
No-load speed	11,000
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
Carton	x
Auxiliary handle (1 602 025 024)	x

125mm Brushless Side Switch Grinder

Battery not included



1000
W
EQUIVALENT

Technical data	GWS 18V-10
Part number	0 601 9J4 002
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
Carton	x
Auxiliary handle (1 602 025 024)	x

125mm Brushless Side Switch Grinder

Battery not included



1000
W
EQUIVALENT

Technical data	GWS 18V-10 SC + Bluetooth module
Part number	0 601 9G3 40B
No-load speed	4,500 – 9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

125mm Brushless Paddle Switch Grinder

Battery not included



1000
W
EQUIVALENT

Technical data	GWS 18V-10 P
Part number	0 601 9J4 100
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
Carton	x
Vibration Control auxiliary handle (2 602 025 171)	x

125mm Brushless Paddle Switch Grinder

Battery not included



1000
W
EQUIVALENT

Technical data	GWS 18V-10 PSC + Bluetooth module
Part number	0 601 9G3 F0B
No-load speed	4,500 – 9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

EXPERT ACCESSORY RANGE

NEW Diamond Metal Wheel 125mm

LASTS UP TO 100X LONGER

than BOSCH 2608603171
Cutting Disc

Does not shatter,
no chemical smell,
no expiry date



18V SYSTEM

125mm Brushless Side Switch Grinder

Battery not included

BITURBO
BRUSHLESS



1500
W
EQUIVALENT

Technical data	GWS 18V-15 C
Part number	0 615 990 L8G
No-load speed	9,800 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
Vibration Control auxiliary handle (2 602 025 171)	x

125mm Brushless Side Switch Grinder

NEW!

Battery not included

BITURBO
BRUSHLESS



1500
W
EQUIVALENT

Technical data	GWS 18V-15 PSC
Part number	0 601 9H6 B00
No-load speed	3,400 – 9,800 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

180mm Brushless Paddle Switch Grinder

NEW!

Battery not included

BITURBO
BRUSHLESS



Technical data	GWS 18V-180 P
Part number	0 601 9H6 L01
No-load speed	6,100 rpm
Grinding/cutting disc, diameter	180 mm
Grinding spindle thread	M14
Comes complete with	
Carton	
Auxiliary handle (1 602 025 024)	
FREE 3 cutting disc	

125mm Brushless Side Switch Grinder

NEW!

Battery not included

BITURBO
BRUSHLESS



1500
W
EQUIVALENT

Technical data	GWS 18V-15 SC
Part number	0 601 9H6 100
No-load speed	3,400 – 9,800 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

125mm Brushless Side Switch Grinder

Battery not included

BITURBO
BRUSHLESS



1500
W
EQUIVALENT

Technical data	GWS 18V-15 P
Part number	0 601 9H6 A00
No-load speed	9,800 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
1 x Protective Clip-on Cutting Guard	x
1 x Vibration Control Auxiliary Handle	x
1 x Protective Guard	x
1 x Quick-locking Nut	x



MASSIVE CUTTING DEPTH

2mm greater cutting depth vs. current Bosch 9" corded grinder



30% LIGHTER*

*versus Current Bosch corded 9" grinder

18V SYSTEM

Brushless Straight Grinder

NEW!

Battery not included



Technical data	GGG 18V-20
Part number	0 601 9B5 440
No-load speed	24,000 rpm
Collet capacity	1/4"
Comes with	2x Spanner 19 mm

Brushless Straight Grinder

Battery not included



Technical data	GGG 18V-23 PLC
Part number	0 601 229 200
No-load speed	23,500 rpm
Collet capacity	1/4"
Comes with	L-BOXX, Spanner 19 mm, Spanner 13mm, Collet with locking nut 6 mm

2.0mm Nibbler

Battery not included



Technical data	GNA 18V-16 E
Part number	0 601 529 600
Cutting capacity in steel (800N/mm ²), max.	0.7 mm
Cutting capacity in steel (600N/mm ²), max.	1 mm
Cutting capacity in steel (400N/mm ²), max.	1.6 mm
Cutting capacity in aluminium (250N/mm ²), max.	2 mm
No-load stroke rate	1,400 spm
Minimum curve radius	40 mm

2.0mm Shear

Battery not included



Technical data	GSC 18V-16 E
Part number	0 601 926 300
Cutting capacity in steel (400 N/mm ²), max.	1.6 mm
Cutting capacity in steel (600 N/mm ²), max.	1 mm
Cutting capacity in steel (800 N/mm ²), max.	0.7 mm
Cutting capacity in aluminium (250 N/mm ²), max.	2.0 mm
No-load stroke rate	3,400 spm
Minimum curve radius	15 mm

Drywall Cut Out Tool

NEW!

Battery not included



Technical data	GCU 18V-30
Part number	0 601 9K8 040
Bit holder	3 – 6.4 mm
No-load speed	30,000 rpm
Router bit diameter	3.17 mm
Rated input power	340 W
Weight	0.915 kg

63mm Band Saw

Battery not included



Technical data	GCB 18V-63
Part number	0 601 2A0 400
No-load speed	162 m/min
Saw blade dimensions	733.0 x 12.7 x 0.35 mm
Cutting capacity	63.5 x 63.5 mm

127mm Band Saw

NEW!

Battery not included



Technical data	GCB 18V-127
Part number	0 601 2B7 000
No-load speed	30 – 115 m/min
Saw blade dimensions	1140 x 12.4 x 0.5 mm
Cutting capacity	127 x 127 mm

Accessories

Band Saw Blades

CB 2818 BiM band saw blade, 18 tpi	2 608 649 000
CB 2824 BiM band saw blade, 24 tpi	2 608 649 001
CB 4424 BiM band saw blade, 24 tpi, 1.1 mm	2 608 649 005
CB 4418 BiM band saw blade, 18 tpi, 1.4 mm	2 608 649 006
CB 4414 BiM band saw blade, 14 tpi, 1.8 mm	2 608 649 007



18V SYSTEM

165mm Circular Saw

Battery not included



Technical data	GKS 18 V-LI
Part number	0 601 66H 040
No-load speed	3,900 rpm
Max. cutting capacity in wood (90°)	51 mm
Max. cutting capacity in wood (45°)	40 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm

165mm Circular Saw

Battery not included



Technical data	GKS 18V-57 G
Part number	0 615 990 J9R
No-load speed	3,400 rpm
Max. cutting capacity in wood (90°)	57 mm
Max. cutting capacity in wood (45°)	39 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm

165mm Brushless Circular Saw

NEW!

Battery not included



Technical data	GKS 18V-57 2
Part number	0 601 6C1 240
No-load speed	5,000 rpm
Max. cutting capacity in wood (90°)	57 mm
Max. cutting capacity in wood (45°)	42 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm
Comes complete with	
5.0Ah Battery + GAL 1840 Charger	0 615 990 N43



184mm Brushless Circular Saw

Battery not included

BITURBO
BRUSHLESS



1800
W
EQUIVALENT

Technical data	GKS 18V-68 C
Part number	0 601 6B5 040
No-load speed	5,000 rpm
Saw blade diameter	184 mm
Saw blade bore diameter	30 mm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
Comes complete with	
Parallel guide	1 608 190 007
1 x circular saw blade, Standard for Wood	2 608 644 590

184mm Brushless Circular Saw (Guide Rail Compatible)

Battery not included

BITURBO
BRUSHLESS



1800
W
EQUIVALENT

Technical data	GKS 18V-68 GC
Part number	0 601 6B5 140
No-load speed	2,500 – 5,000 rpm
Saw blade diameter	184 mm
Saw blade bore diameter	30 mm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
Comes complete with	
Parallel guide	1 608 190 007
1 x circular saw blade, Standard for Wood	2 608 644 590
L-BOXX 238	1 600 A01 2G2

EXPERT ACCESSORY RANGE

BOSCH Expert circular saw blades

View the full range at

<https://www.bosch-pt.com.au/au/en/knowledge-innovation/accessories-product-finder/>



18V SYSTEM

136mm Metal Circular Saw

Battery not included

NEW!



Technical data	GKM 18V-50
Part number	0 601 6B8 040
No-load speed	4,250 rpm
Saw blade diameter	136 mm
Saw blade bore diameter	20 mm
Max. cutting capacity in metal (90°)	50 mm
Rafter Hook	x
Swarf collection	x

EXPERT ACCESSORY RANGE

BOSCH Expert mitre saw blades

View the full range at

<https://www.bosch-pt.com.au/au/en/knowledge-innovation/accessories-product-finder/>



140mm Brushless Rail/Track Saw

Battery not included

BITURBO
BRUSHLESS



1600
W
EQUIVALENT

Technical data	GKT 18V-52 GC
Part number	0 601 6B4 040
No-load speed	2,800 – 5,500 rpm
Saw blade diameter	140 mm
Saw blade bore diameter	20 mm
Bevel angle	-1° – 47°
Baseplate	305 x 169 mm
Comes complete with	
L-BOXX 238	1 600 A01 2G2
1 x circular saw blade for General Purpose	2 608 644 644

Accessories

Specialised Rail/Track Saw Blades		
140mm, 42 Teeth, for Wood	2 608 644 644	
140mm, 42 Teeth, for Aluminium	2 608 644 092	
140mm, 42 Teeth, for Fibre Cement	2 608 644 120	
140mm, 42 Teeth, for Laminate	2 608 644 126	

FSN Rail System		
800mm	1 600 Z00 005	
1100mm	1 600 Z00 006	
1600mm	1 600 Z00 00F	
2100mm	1 600 Z00 007	
3100mm	1 600 Z00 008	

Guide Rail Connector		
	1 600 Z00 009	

Angled Guide Rail		
	1 600 Z00 00A	

Rail Bag		
1650mm	1 610 Z00 020	

Locking Clamps		
	1 600 A00 1F8	

216mm BITURBO Brushless Mitre Saw

Battery not included

BITURBO
BRUSHLESS



NEW!

1600
W
EQUIVALENT

Technical data	GCM 18V-216 D
Part number	
Cutting capacity, 0°	66 x 305 mm
Mitre setting	48° L / 48° R
Bevel setting	47° L / 47° R
Cutting line indication	Dual Line Laser
No-load speed	5,000 rpm
Saw blade diameter	216 mm
Weight	16.2 kg
Comes complete with	
1 x circular saw blade, Standard for Wood.	x
Insert plate (1 609 B03 717)	x

Saw Stands

GTA 560	
Stand for 216mm Table saw	0 601 B22 740

GTA 600	
Stand for GTS 10 J (Part No. 0 601 B30 540)	0 601 B22 002

GTA 6000	
Stand for GTS 10 XC (Part No. 0 601 B30 440)	0 601 B24 100

GTA 60 W	
Gravity Rise Stand, built for GTS 10 J and GTS 10 X.	0 601 B12 000

T 1 B	
This fits all Mitre Saws. Mitre Saw stand with 2.6m extension arms.	0 601 B12 310

GTA 3800	
This fits all Mitre Saws. Mitre Saw stand with 3.8m extension arms.	0 601 B24 000

GTA 2500 W Gravity Rise	
Gravity Rise Stand, built for all Mitre Saws.	0 601 B12 141

18V SYSTEM

216mm BITURBO Brushless Mitre Saw

Battery not included

BITURBO
BRUSHLESS



1600
W
EQUIVALENT

Technical data	GCM 18V-216 DC
Part number	0 601 B41 040
Cutting capacity, 0°	70 x 300 mm
Cutting capacity, 45° mitre	65 x 214 mm (L) (R)
Cutting capacity, 45° bevel	40 x 300 mm (L) / 20 x 300 mm (R)
Mitre setting	52° L / 60° R
Bevel setting	47° L / 47° R
Cutting Line Indication	Dual Line Laser
No-load speed	2,500 - 4,500 rpm
Saw blade diameter	216 mm
Weight	15.3 kg
Comes complete with	
1 x circular saw blade, Standard for Wood.	x
Insert plate (1 609 B03 717)	x
SDS saw blade lock (1 609 B05 323)	x



305mm BITURBO Brushless Glide Saw

Battery not included

BITURBO
BRUSHLESS



2000
W
EQUIVALENT

Technical data	GCM 18V-305
Part number	0 601 B43 040
Max. Cutting depth 0°	120 mm
Max. Cutting depth 45°	60 mm
Max. Cross cut capacity 0°/45°	400° / 240 mm
Mitre setting	52° / 60°
Bevel setting	47° / 47°
Tool dimensions (width x length x height)	630 x 790 x 565 mm
No-load speed	2,550 - 4,000 rpm
Saw blade diameter	305 mm
Weight (with battery)	27.8 kg

*With Spacer



216mm BITURBO Brushless Table Saw

Battery not included

BITURBO
BRUSHLESS



1600
W
EQUIVALENT

Technical data	GTS 18V-216
Part number	0 601 B44 040
Cutting height, 90°	70 mm
Rip capacity	635 mm
Saw blade bore diameter	30 mm
Base blade thickness	2.0/1.4 mm
Bevel range	0° - 45°
Tool dimensions (width x length x height)	658 x 332 x 553
No-load speed	4,500 rpm
Saw blade diameter	216 mm
Weight	20.2 kg



18V SYSTEM

Bow Handle Jigsaw

Battery not included



Technical data	GST 18V-125 B
Part number	0 601 5B3 040
Stroke rate at no load	0 – 3,500 spm
Cutting depth in wood / aluminium / metal	125 mm
Stroke height	26 mm
Comes complete with	
1 x jigsaw blade T 144 DP, Precision for Wood.	x
1 x jigsaw blade T 244 D, Speed for Wood.	x
1 x jigsaw blade T 308 B, Extra-clean for Wood.	x

Barrel Grip Jigsaw

Battery not included



Technical data	GST 18V-125 S
Part number	0 601 5B2 040
Stroke rate at no load	800 – 3,500 spm
Cutting depth in wood / aluminium / steel	125 mm
Stroke height	26 mm
Comes complete with	
1 x jigsaw blade T 144 DP, Precision for Wood.	x
1 x jigsaw blade T 244 D, Speed for Wood.	x
1 x jigsaw blade T 308 B, Extra-clean for Wood.	x

Bow Handle Jigsaw

Battery not included



Technical data	GST 18V-155 BC
Part number	0 601 5B1 041
Stroke rate at no load	0 – 3,800 spm
Cutting depth in wood / aluminium / metal	155 mm
Stroke height	26 mm
Comes complete with	
1 x jigsaw blade T 144 DP, Precision for Wood.	x
1 x jigsaw blade T 244 D, Speed for Wood.	x
1 x jigsaw blade T 308 B, Extra-clean for Wood.	x

Barrel Grip Jigsaw

Battery not included



Technical data	GST 18V-155 SC
Part number	0 601 5B0 041
Stroke rate at no load	800 – 3,800 spm
Cutting depth in wood / aluminium / steel	155 mm
Stroke height	26 mm
Comes complete with	
1 x jigsaw blade T 144 DP, Precision for Wood.	x
1 x jigsaw blade T 244 D, Speed for Wood.	x
1 x jigsaw blade T 308 B, Extra-clean for Wood.	x



EXPERT
ACCESSORY RANGE

BOSCH Expert jigsaw blades
 For exceptional durability

View the full range at
<https://www.bosch-pt.com.au/au/en/knowledge-innovation/accessories-product-finder/>

Orbital Sander

Battery not included



Technical data	GSS 18V-13
Part number	0 601 9L0 100
No-load orbital stroke rate	12,000 – 20,000 opm
Orbit diameter	1.6 mm
Sanding plate, width x length	80 x 130 mm (rectangle)
Comes complete with	
Base plate, 113 x 101 mm	x
Base plate, 80 x 130 mm	x
Delta base plate, 100 x 150 mm	x
3 x sanding sheet C470, Best for Wood + Paint, 120	Delta, 113 x 101mm, 80 x 130mm
1 x Hole Punch	x
1 x Dust bag	x
1 Piece Kit	0 615 990 N44

GSS 18V-13 Orbital Sander, GBA 18V 5.0Ah M-C, GAL 18V-40 Charger

Random Orbital Sander

Battery not included



Technical data	GEX 18V-125
Part number	0 601 372 241
Pad Diameter	125 mm
No-load Speed	6,000 – 10,000 min-1
Orbital Stroke Rate	12,000 – 20,000 min-1
Orbit	2.5 mm
Comes complete with	
1 x sanding sheet C430, P120	x
1 x dust bag	x

18V SYSTEM

Recip Saw

Battery not included



Technical data	GSA 18 V-Li C
Part number	0 601 6A5 040
Stroke lengths	21 mm
Stroke rate (1st gear / 2nd gear)	0 – 3,050 spm
Cutting depth in wood	200 mm
Cutting depth in metal profiles and metal pipes	100 mm
Comes complete with	
1 x recip saw blade, Flexible for Metal.	x
1 x recip saw blade, Flexible for Metal.	x
1 x recip saw blade, Flexible for Wood + Metal.	x
1 Piece Kit	0 615 990 M81
GSA 18V-Li C Recip Saw, GBA 18V 5.0Ah M-C, GAL 18V-40 Charger, 9° Carbide Pruning Blade	

Recip Saw

Battery not included



Technical data	GSA 18 V-Li
Part number	0 601 64J 042
Stroke lengths	28 mm
Stroke rate (1st gear / 2nd gear)	2,400 – 2,700 spm

BITURBO Brushless Recip Saw

Battery not included

BITURBO
BRUSHLESS



Technical data	GSA 18V-28
Part number	0 601 6C0 040
Stroke lengths	28 mm
Stroke rate (1st gear / 2nd gear)	0 – 2,900 spm
Cutting depth in wood	230 mm
Cutting depth in metal profiles and metal pipes	150 mm
Comes complete with	
1 x recip saw blade Heavy for Wood + Metal.	x
1 x recip saw blade Endurance for Heavy Metal	x

NEW!

Brushless Recip Saw

Battery not included



Technical data	GSA 18V-32
Part number	0 615 990 M02
Stroke lengths	32 mm
Stroke rate (1st gear / 2nd gear)	0 – 2,500 spm
Cutting depth in wood	230 mm
Cutting depth in metal profiles and metal pipes	175 mm
Comes complete with	
1 x recip saw blade Heavy for Wood + Metal.	x
1 x recip saw blade Endurance for Heavy Metal	x

EXPERT ACCESSORY RANGE

BOSCH Expert recip saw blades

Unlock a new performance class

View the full range at

<https://www.bosch-pt.com.au/au/en/knowledge-innovation/accessories-product-finder/>



Starlock PLUS Multi-Tool

Battery not included



Technical data	GOP 18V-34
Part number	0 601 8G2 000
No-load rotation	10,000 – 20,000 rpm
Oscillation angle on left and right	3.4°
Grip circumference	180 mm
Comes complete with	
1 x cutting blade (PAIZ 32 APB)	x

NEW!

82mm Planer

Battery not included



Technical data	GHO 18V-26
Part number	0 601 5B5 001
No-load speed	13,600 rpm
Planing width, max.	82 mm
Rebating depth	9 mm
Cutting depth	0 – 2.6 mm
Motor Brake	Sub 15 sec
Chamfering	3V- Groves @ 45 degrees

COMING SOON

NEW!

18V SYSTEM

20° 16GA Finish Nailer

COMING SOON

NEW!

Battery not included



Technical data	GNH 18V-64-2 M
Part number	0 601 482 000
Magazine capacity	105 pieces
Magazine angle	20°
Nail diameter	1.6 mm / 16 ga
Nail length	32 – 64 mm
Nail type	16G 20 angle brads
Weight excl. battery	3.0 kg



34° 15GA Finish Nailer

COMING SOON

NEW!

Battery not included



Technical data	GNH 18V-64 MD
Part number	0 601 482 200
Magazine capacity	105 pieces
Magazine angle	34°
Nail diameter	1.8 mm / 15 ga
Nail length	32 – 64 mm
Nail type	DA series brad
Weight excl. battery	3.1 kg



0° 18GA Finish Nailer

COMING SOON

NEW!

Battery not included



Technical data	GNH 18V-50 M
Part number	0 601 482 400
Magazine capacity	105 pieces
Magazine angle	0°
Nail diameter	1.2 mm / 18 ga
Nail length	16 – 54 mm
Nail type	C1 series brad
Weight excl. battery	



0° Narrow Crown Stapler

COMING SOON

NEW!

Battery not included



Technical data	GTH 18V-38 M
Part number	0 601 482 500
Magazine capacity	110 pieces
Magazine angle	0°
Nail diameter	1.2 mm / 18 ga
Nail length / crown width	9.5 – 38 / 5.8 mm
Staple type	6000 series
Weight excl. battery	



18V SYSTEM

38mm Concrete Nail Gun GNB 18V-38



Technical data

Part number	0 601 9L7 001
Max. insertion frequency*	2 s ⁻¹
Standard magazine capacity	22 nails
Actuation mode	Full sequential
Weight (without battery)	4.1 kg



INNOVATIVE DRIVE

Powerful BITURBO brushless technology in combination with innovative and robust air-spring drive.

COUNTERSINK DEPTH ADJUSTMENT

For more precise depth control

LED LIGHT

Illuminates dark workspaces.

DRY-FIRE LOCKOUT

Adds extra workpiece protection when nail magazine is empty.

TOOLLESS JAM CLEARING

Quick and easy access to remove jammed nails with push-out pin.

HEALTH

No creation of airborne dust!

BOSCH OFFERS A NAIL RANGE

between 13 and 38 mm to cover a broad range of concrete and steel direct fastening applications.



USER INTERFACE

Additional battery indication
Tool trouble shooting indication
Tool reset button
(press after trouble shooting)

UTILITY HOOK

Mounts on nailer for easy storage in between use.


CONCRETE NAILS

To fasten drywall tracks on concrete with nails



Model	Nail length	Part number
NB-16	16 mm	1 600 A02 F4K
NB-19	19 mm	1 600 A02 F4L
NB-25	25 mm	1 600 A02 F4M
NB-32	32 mm	1 600 A02 F4N
NB-38	38 mm	1 600 A02 F4P

Drywall fastens wooden tracks on concrete



Model	Nail length	Part number
NK-35	16 mm	1 600 A02 F4R

Fastening drywall tracks on steel



Model	Nail length	Part number
NM-13	13 mm	1 600 A02 F4S
NM-16	16 mm	1 600 A02 F4T
NM-19	19 mm	1 600 A02 F4U

18V SYSTEM

310ml Caulking Gun

Battery not included



Technical data	GCG 18V-310
Part number	0 601 9C4 100
Push Force	3.5 kN
Capacity Cartridges	310 ml
Capacity Sachets	x
Feed rate	8 mm / sec
Weight excl. battery	2 kg

600ml Caulking Gun

Battery not included



Technical data	GCG 18V-600
Part number	0 601 9C4 001
Push Force	3.5 kN
Capacity Cartridges	310; 400 ml
Capacity Sachets	400; 600 ml
Feed rate	9 mm / sec
Weight excl. battery	2.2 kg

Heat gun

Battery not included



Technical data	GHG 18V-50
Part number	0 601 2A6 500
Heat-up time to 300°C	6 s
Working temperature	300 – 500°C
Comes complete with	
REFLECTOR NOZZLE, 32 X 33 mm	1 609 390 453

6.4mm Brushless Rivet Gun

Battery not included



Technical data	GRG 18V-16 C
Part number	0 601 9K5 000
Pull force, max.	16,000 N
Stroke length	0 – 25 mm
Rivet diameter	3 – 6.4 mm
Auto and manual modes	x
1 Piece Kit	
0 601 9K5 041	
1 x L-BOXX 136, 2 x battery GBA 18V 5.0Ah and Quick charger GAL 18V-40	



18V SYSTEM

Blower

Battery not included



Technical data	GBL 18V-120
Part number	0 601 9F5 140
No-load speed	17,000 rpm
Max. air speed	75 m/s
Max. airflow	120 m³/h
Runtime	Speed I : 9 min/Ah; Speed II : 5 min/Ah
Weight excl. battery	1.1 kg
Comes complete with	
4 x Accessories (Nozzle, Extension tube, Deep hole Nozzle, Dust Collection Tube)	x

700ml Dust Extractor

Battery not included



Technical data	GAS 18V-1
Part number	0 601 9C6 200
Container volume	0.70 l
Filter surface area	55 cm²
Max. vacuum pressure (turbine)	60 mbar
Max. airflow rate (turbine)	10.0 l/s
Comes complete with	
Crevice nozzle, 2 x suction tubes, Floor nozzle	x
Flexible extension tube	

10L Wet & Dry Dust Extractor

Battery not included



Technical data	GAS 18V-10 L
Part number	0 601 9C6 302
Filter surface area	2.375 cm²
Max. vacuum pressure (turbine)	90 mbar
Max. airflow rate (turbine)	24.0 l/s
Comes complete with	
1 x 1.6 m hose (2 608 000 658)	x
1 x crevice nozzle, 250 mm (2 608 000 661)	x
1 x elbow pipe (2 608 000 659)	x
3-piece suction pipe set (2 608 000 660)	x
Wheeled model comes with	
Technical data	
Part number	0 601 9C6 302

12L M-Class Wet & Dry Dust Extractor

COMING SOON

Battery not included

BITURBO
BRUSHLESS



Technical data	GAS 18V-12 M
Part number	0 601 9K2 050
Max. vacuum pressure (turbine/vac)	170/140 mbar
Max. airflow rate (turbine/vac)	30/23 l/s
Gross volume	12 litre
Net volume dry	8 litre
Net volume wet	6 litre
Weight (incl. 8Ah battery)	8.3 kg
Comes complete with	
1 x Carrying strap (1 607 000 F3J)	x
1 x GCT 30-42 (1 600 A02 GG6)	x
1 x 3 m hose (2 608 000 772)	x
1 x Elbow pipe (2 608 000 769)	x
1 x crevice nozzle (2 608 000 768)	x
1 x Brush (2 608 000 770)	x
Disposable Bags, 10 pieces	2 608 000 773
Filter M-Class	2 608 000 771

MAKE DUST HISTORY

Protect the tools you can't replace

Scan here to learn more



NEW! AUTO START TAGS

Universally compatible
Auto-start functionality
Vibration detection
1600A02GF5
1600A02GG2



18V SYSTEM

Bluetooth Radio

Battery not included



Technical data	GPB 18V-2 C
Part number	0 601 4A3 040
Sources	FM, Bluetooth, AUX
FM Frequency	87.5 – 108
Radio Presets	8 x FM
Weight without Battery	2.32 kg
Dimensions	347.5 x 176.3 x 153.9 mm



Bluetooth & DAB+ Radio

Battery not included



Technical data	GPB 18V-2 SC
Part number	0 601 4A3 140
Sources	FM, DAB+, Bluetooth, AUX
FM Frequency	87.5 – 108
DAB+ Frequency	174.928–239.200
Radio Presets	8 x FM, 8 x DAB+
Weight without Battery	2.32 kg
Dimensions	347.5 x 176.3 x 153.9 mm



dab+ connected

Preset up to 8 of your favourite digital radio channels for listening anytime.



Bluetooth connected

Connect directly to your smart device to play your music anywhere, anytime.

Bluetooth & DAB+ Radio

Battery not included



Technical data	GPB 18V-5 SC
Part number	0 601 4A4 140
Sources	FM, DAB+, Bluetooth, AUX
FM Frequency	87.5 – 108
DAB+ Frequency	174.928–239.200
Radio Presets	4 x FM, 4 x DAB+
Weight without Battery	8.6 kg
Dimensions	351 x 368 x 341 mm



18V SYSTEM

300 Lumen Worklight

Battery not included



Technical data	
Part number	GLI 18V-300
Part number	0 601 4A1 100
Max. operating time 18V	300 mins/Ah
Weight excl. battery	0.3 kg
Luminous flux	300 lumen

800 Lumen Worklight

Battery not included



NEW!

Technical data	
Part number	GLI 18V-800
Part number	0 601 443 600
Max. operating time 18V	30 hours / 150min per Ah
Brightness levels	3
Flexibility	180° tilting angle + 360° swivel of light head Magnetic
Weight excl. battery	0.5 kg
Luminous flux	800 lumen

1,200 Lumen Worklight

Battery not included



Technical data	
Part number	GLI 18V-1200 C
Part number	0 601 446 700
Max. operating time (high setting)	16 hours (12.0Ah)
Max. operating time (low setting)	26 hours (12.0Ah)
Weight excl. battery	1.4 kg
Luminous flux	1200 lumen
Compatible tripod thread	1/4"
Dust & splash protection	IP64
Suits tripod	BT 150 (0 601 096 B00)

2,200 Lumen Worklight

Battery not included



Technical data	
Part number	GLI 18V-2200 C
Part number	0 601 446 501
Max. operating time (high setting)	3.5 hours (12.0Ah)
Max. operating time (low setting)	8.8 hours (12.0Ah)
Weight excl. battery	1.9 kg
Luminous flux	2200 lumen
Compatible tripod thread	5/8"
Dust & splash protection	IP64
Suits tripod	BT 150 5/8" (0 601 096 C80) BT 170 HD (0 601 091 300) BT 170 HD (0 601 091 400)

4,000 Lumen Worklight

Battery not included



Technical data	
Part number	GLI 18V-4000 C
Part number	0 601 446 800
Max. operating time (high setting)	6 hours (12.0Ah)
Max. operating time (low setting)	24 hours (12.0Ah)
Weight excl. battery	2 kg
Luminous flux	4,000 lumen
Preset levels	1000 / 2000 / 4000 lm
Compatible tripod thread	5/8"
Suits tripod	BT 150 5/8" (0 601 096 C80) BT 170 HD (0 601 091 300) BT 170 HD (0 601 091 400)

10,000 Lumen Worklight

Battery not included



Technical data	
Part number	GLI 18V-10000 C
Part number	0 601 446 900
Max. operating time (high setting)	2.5 hours (12.0Ah)
Max. operating time (low setting)	24 hours (12.0Ah)
Weight excl. battery	3.9 kg
Luminous flux	10,000 lumen
Preset levels	1000 / 5000 / 10,000 lm
Compatible tripod thread	5/8"
Suits tripod	BT 150 5/8" (0 601 096 C80) BT 170 HD (0 601 091 300) BT 170 HD (0 601 091 400)

Worklight & Measuring tool Tripods



Technical data	
Part number	BT 150
Part number	0 601 096 B00
Tripod thread	1/4"
Work height	52-147 cm
Technical data	
Part number	BT 150 (5/8")
Part number	0 601 096 C80
Tripod thread	5/8"
Work height	52-147 cm

Technical data	
Part number	BT 170 HD
Part number	0 601 091 B00
Tripod thread	5/8"
Work height	107-165 cm

18V SYSTEM

NEW!

18V OUTDOOR POWER EQUIPMENT

New range. New tools. Same 18V Battery Platform.
All backed by a 6-year guarantee.



BITURBO
BRUSHLESS

6 YEARS

Tool & Battery
Guarantee*

*After registration at PRO360.com

PROFESSIONAL
18V
SYSTEM

18V SYSTEM

60cm Hedgecutter

NEW!

Battery not included



Technical data	GHE 18V-60
Part number	0 600 8C9 000
No-load speed	3,000 spm
Blade length	60 cm
Tooth opening	23 mm
Cutting capacity	20 mm
Runtime (no load) with 4Ah	180 min
Weight without Battery	3 kg
Packaging dimensions (L x W x B)	1198 x 248 x 205 mm
1 Piece Kit	0 615 992 63L

1 x 5.0Ah Lithium-ion Battery + GAL 18V-40 Charger



Metal Blade Protector

"Cut Protection" reduces injury risk



Anti Blocking System

Continuous & easy cutting with patented Anti-Blocking System

780 m³/h Leaf Blower

NEW!

Battery not included

BITURBO
BRUSHLESS



Technical data	GBL 18V-750
Part number	0 600 8D2 000
Voltage	18 V
Volumetric flow	750 m³/h
Air speed	200 km/h
Weight without Battery	2.9 kg
Packaging dimensions (L x W x D)	520 x 277 x 315 mm
1 Piece Kit	0 615 992 63K

1 x 8.0Ah ProCORE18V Battery + GAL 1880 CV Charger



Improved user protection

Well-balanced & lightweight design that reduces strain



Strong Performance

Brushless motor and axial fan deliver strong-performance, heavier-duty debris movement

46cm Lawn Mower

NEW!

Battery not included

BITURBO
BRUSHLESS



Technical data	GRA 18V2-46
Part number	0 600 8C8 000
Voltage	18V
Recommended lawn size	1,000 m²
Cutting diameter	46 cm
Maximum possible battery energy	432 Wh (2x12Ah)
Grass bag capacity	60 litres
Cutting height levels	6
Height of cut	30 – 70 mm
Mulching feature	x
Sound power	94 dB(A)
Weight without Battery	2 kg
1 Piece Kit	0615 992 63S

2 x 8.0Ah ProCORE 18V Batteries + GAL 18V-160 Charger

2-in-1 Line Trimmer & Brushcutter

NEW!

Battery not included



Technical data	GFR 18V-23
Part number	0 600 8D0 000
Voltage	18 V
No-load speed	4,500 – 6,400 rpm
Cutting diameter (blade)	23 cm
Blade thickness	2 mm
Bore	25.4 mm
Cutting diameter	33 mm
Cutting diameter (line)	2.4 mm
Weight without Battery	3.6 kg
Packaging dimensions (L x W x D)	1.625 x 220 x 136 mm
1 Piece Kit	0 615 992 63M

1 x 5.0Ah Lithium-ion Battery + GAL 18V-40 Charger

HEATED CLOTHING

FEEL THE HEAT

Heat pads on the chest & lower back



3 TEMP SETTINGS



Low



Medium



High

DUAL POWER

12V Compact & light weight
18V Maximised runtime

Heated Jacket

Battery not included



Technical data	GHJ 12+18V XA
Part number	S: 0 618 800 0DX M: 0 618 800 0DY L: 0 618 800 0DZ XL: 0 618 800 0E0 2XL: 0 618 800 0E1 3XL: 0 618 800 0E2
Material Composition	Polyester & Spandex
Fabric construction	Softshell
Available colours	Black
Certification	Oeko-Tex Standard 100
Battery voltage	12V
Heat Levels	3
Heat Zones	3 (right / left chest, lower back)
Heat-up Time	3 mins
Comes complete with	
Battery adapter GAA 12V-21 Professional (0 618 800 079)	

Heated Vest

Battery not included



Technical data	GHV 12+18V XV
Part number	S: 0 618 800 0EA M: 0 618 800 0EB L: 0 618 800 0EC XL: 0 618 800 0ED 2XL: 0 618 800 0EE 3XL: 0 618 800 0EF
Material Composition	Polyester & Spandex
Fabric construction	Softshell
Available colours	Black
Certification	Oeko-Tex Standard 100
Battery voltage	12V
Heat Levels	3
Heat Zones	3 (right / left chest, lower back)
Heat-up Time	3 mins
Comes complete with	
Battery adapter GAA 12V-21 Professional (0 618 800 079)	

Heated Hoodie

Battery not included



Technical data	GHH 12+18V XV
Part number	S: 0 618 800 0EP M: 0 618 800 0ER L: 0 618 800 0ES XL: 0 618 800 0ET 2XL: 0 618 800 0EU 3XL: 0 618 800 0EV
Material Composition	Polyester & Spandex
Available colours	Black
Certification	Oeko-Tex Standard 100
Battery voltage	12V
Heat Levels	3
Heat Zones	3 (right / left chest, lower back)
Heat-up Time	3 mins
Comes complete with	
Battery adapter GAA 12V-21 Professional (0 618 800 079)	

12V Compatible Battery Adaptor

Battery not included

- ✓ Power your heated jacket
- ✓ Charge your phone



GAA 12V-21	0 618 800 079
Included with Heated Clothing	

18V Compatible Battery Adaptor

Battery not included

- ✓ Power your heated jacket
- ✓ Charge your phone



GAA 18V-24	1 600 A00 J61
Not included with Heated Clothing	

NOTES

6 YEARS

**Tool & Battery
Guarantee***

*With online registration

XLOCK

BITURBO
BRUSHLESS

Pro **CORE** 18V

BULLDOG



PROFESSIONAL 12V SYSTEM

REAL POWER.
UNREAL SIZE.



46	12V Combo Kits
47	Batteries & Chargers
48	Drills / Driver / Impact Wrench
49	Rotary Tool/ Multi Cutter/ Shears / Straight Grinder/ Vacuum
50	Recip Saw / Circular Saw / Multi Tool / Jigsaw / Worklight
51	Planer / Router / Orbital Sander
52	Measuring Tools

12V SYSTEM

2 Piece 2.0Ah Combo Kit

Part Number	0 615 990 L1G
30Nm Drill Driver	GSR 12V-15
105Nm Impact Driver	GDR 12V-105
2x 2.0Ah Batteries	GBA 12V 2.0Ah
12V Charger	GAL 12V-40
Tool Bag	Tool Bag



2 Piece 2.0Ah Combo Kit

Part Number	0 615 990 L1H
35Nm Hammer Drill	GSB 12V-15
105Nm Impact Driver	GDR 12V-105
2x 2.0Ah Batteries	GBA 12V 2.0Ah
12V Charger	GAL 12V-40
Tool Bag	Tool Bag



2 Piece 3.0Ah Brushless Combo Kit

Part Number	0 615 990 N4L
35Nm Impact Drill	GSB 12V-35
110Nm Impact Driver	GDR 12V-110 V-EC
2 x 12V 3.0Ah Battery	GBA 12V 3.0ah
12V Charger	GAL 12V-40
Tool Bag	Tool Bag



1 Piece 2.Ah Combo Kit

Part Number	0 615 994 0R1
Green Beam Line Laser Level	GLL 3-80 CG
1 x 12v 2.0Ah Battery	GBA 12V 2.0Ah
12V Charger	GAL 12V-40
Hard Case	L-BOXX 136



12V SYSTEM

12V 2.0Ah Battery



Technical data	GBA 12V 2.0Ah
Part number	1 600 Z00 02X
Battery voltage	12V
Weight	180 g

12V 3.0Ah Battery



Technical data	GBA 12V 3.0Ah
Part number	1 600 A00 X79
Battery voltage	12V
Weight	180 g

12V 4.0Ah Battery



Technical data	GBA 12V 4.0Ah
Part number	1 600 Z00 02Y
Battery voltage	12V
Weight	385 g

12V 6.0Ah Battery



Technical data	GBA 12V 6.0Ah
Part number	1 600 A00 X7H
Battery voltage	12V
Weight	385 g

12V 4.0Ah Fast Charger



Technical data	GAL 12V-40
Part number	1 600 A01 9R7
Battery charging voltage	10.8 – 12V
Weight	450 g
Charge rate (per hour)	4.0 A

12V 2.0Ah + Fast Charger

0 615 990 GA6



Battery Adaptor & USB Charger

Battery not included



Technical data	GAA 12V-21
Part number	0 618 800 079
Weight	80 g

12V SYSTEM

30Nm Hammer Drill

Battery not included



Technical data	GSR 12V-15
Part number	0 601 9B6 901
Torque	30 Nm
No-load speed (1st gear / 2nd gear)	0 – 380 / 0 – 1,300 rpm
Max. screw diameter	7 mm
Max. drilling diameter in wood	19 mm
Max. drilling diameter in masonry	10 mm
Max. drilling diameter in steel	10 mm

35Nm Brushless Hammer Drill

Battery not included



Technical data	GSR 12V-35
Part number	0 601 9J9 002
Torque	35 Nm
No-load speed (1/min)	0 – 460 / 1,750 rpm
Max. screw diameter	8 mm
Max. drilling diameter in wood	32 mm
Max. drilling diameter in masonry	10 mm
Max. drilling diameter in steel	10 mm

20Nm Brushless Drill Driver

Battery not included



Technical data	GSR 12V-20
Part number	0 601 9D4 002
Torque	20 Nm
Screw diameter	7 mm
No-load speed (1st gear)	0 – 400 rpm
No-load speed (2nd gear)	0 – 1,300 rpm
Max. drilling diameter in wood	30 mm
Max. drilling diameter in steel	10 mm

110Nm Brushless Impact Driver

Battery not included



Technical data	GDR 12V-110
Part number	0 601 9E0 002
Torque	110 Nm
Screw diameter	M 2 – M 12
No-load speed	1st level 0 – 1,200 rpm, 2nd level 0 – 2,600 rpm
Impact rate	1st level 0 – 2,700 bpm, 2nd level 0 – 3,100 bpm
Tool holder	1/4" internal hexagon

115Nm Brushless Impact Wrench

Battery not included



Technical data	GDS 12V-115
Part number	0 601 9E0 101
Torque	115 Nm
Screw diameter	M 4 – M 12
No-load speed	0-2,600 rpm
No-load speed (1st level)	0 – 1,200 rpm
Impact rate	0 – 3,100 bpm
Tool holder	3/8" external square

11Nm Right Angle Drill

Battery not included



Technical data	GWB 12V-10
Part number	0 601 390 905
Torque	11 Nm
Max. screw diameter	6 mm
Max. drilling diameter in wood	10 mm

12V SYSTEM

Rotary tool

Battery not included



Technical data	GRO 12V-35
Part number	0 601 9C5 000
No-load speed	5,000 – 35,000 rpm
Comes complete with	
Arbour (2 610 927 731)	x
Collet (1 619 P11 363)	x
Cutting disc (2 615 110 426)	x
Housing adapter (1 619 P11 344)	x

76mm Multi Cutter

Battery not included



Technical data	GWS 12V-76
Part number	0 601 9F2 000
No-load speed	19,500 rpm
Grinding/cutting disc, diameter	76 mm
Bore size, diameter	10.0 mm
Grinding spindle thread	M 5
Comes complete with	
1 x carbide cutting disc	x
2 x inox cutting disc	x

12V Shears

Battery not included



Technical data	GUS 12V-300
Part number	0 601 9B2 901
No-load stroke rate	700 spm
Cutting capacity in PVC (with 4 Ah), max.	300 m
Cutting depth	11 mm

12V Metal Shears

Battery not included



Technical data	GSC 12V-13
Part number	0 601 926 105
No-load stroke rate	3,600 spm
Minimum curve radius	15 mm
Cutting cap. in steel (400 N/mm ²), max.	1.3 mm
Cutting cap. in aluminium (250 N/mm ²), max.	2 mm

Straight Grinder

Battery not included



Technical data	GWG 12V-50 S
Part number	0 601 3A7 000
Pad Diameter	50 mm
No-load Speed (5 settings)	5,000 / 7,500 / 10,000 / 12,500 / 15,000 rpm
Collet	6mm / 8mm
Weight	0.53 kg

Dust Vacuum

Battery not included



Technical data	GAS 12V
Part number	0 601 9E3 000
Container volume	350 ml
Filter surface area	408 cm ²
Max. vacuum pressure (turbine)	45 mbar
Max. airflow rate (turbine)	15.0 l/s

12V SYSTEM

Recip Saw

Battery not included



Technical data	GSA 12V-14
Part number	0 601 64L 902
Stroke lengths	14.5 mm
Cutting depth in wood	65 mm
Cutting depth in metal profiles and metal pipes	50 mm
Stroke rate (1st gear / 2nd gear)	0 – 3,000 spm
Comes complete with	
1 x reciprocating saw blade for Wood + Metal	x
1 x reciprocating saw blade for Metal	x

85mm Circular Saw

Battery not included



Technical data	GKS 12V-26
Part number	0 601 6A1 001
No-load speed	1,400 rpm
Max. cutting capacity in wood (90°)	26.5 mm
Max. cutting capacity in wood (45°)	17 mm
Saw blade diameter	85 mm
Saw blade bore diameter	15 mm
Comes complete with	
1 x circular saw blade, Standard for Wood	x
Parallel guide/guide rail adapter	x

Starlock Multi tool

Battery not included



STARLOCK



Technical data	GOP 12V-28 EC
Part number	0 601 8B5 001
No-load rotation	5,000 – 20,000 opm
Oscillation angle on left and right	1.4 °

Jigsaw

Battery not included



Technical data	GST 12V-70
Part number	0 601 5A1 040
Stroke rate at no load	1,500 – 2,800 spm
Cutting depth in wood	70 mm
Mitre cuts	0 – 45 °
Pendulum	3 stage
Comes complete with	
Anti-splinter guard (2 601 016 093)	x
Covering Hood (1 619 P10 583)	x
Pad (1 619 P07 958)	x

300 Lumen Worklight

Battery not included



Technical data	GLI 12V-300
Part number	0 601 4A1 000
Max. operating time 12 V	180 mins/Ah
Weight excl. battery	0.15 kg
Luminous flux	300 lumen

330 Lumen Worklight

Battery not included



Technical data	GLI 12V-330
Part number	0 601 4A0 000
Max. operating time 12 V	180 mins/Ah
Weight excl. battery	0.3 kg
Luminous flux	330 lumen
Brightness levels	2

12V SYSTEM

56mm Planer

Battery not included



Technical data	GHO 12V-20
Part number	0 601 5A7 070
No-load speed	14,500 rpm
Planing width, max.	56 mm
Rebating depth	0 – 17 mm
Cutting depth	0 – 2 mm
Comes complete with	
2 x planer blade (2 608 000 672)	x

8mm Router

Battery not included



Technical data	GKF 12V-8
Part number	0 601 6B0 072
No-load speed	13,000 rpm
Compatible collet diametres	6 mm / 8 mm / ¼"
Weight excl. battery	1,1 kg
Comes complete with	
Collet with nut ¼" (1 600 A00 H85)	x
Open-ended spanner 17 mm (2 609 110 438)	x

Orbital Sander

Battery not included



Technical data	GSS 12V-13
Part number	0 601 9L0 040
Interchangeable sanding plates	3 kinds
No-load Speed	6,000 – 10,000 rpm
Orbital Stroke Rate	12,000 – 20,000 opm
Orbit	1.6 mm
Comes complete with	
Base plate, 113 x 101 mm	x
Base plate, 80 x 130 mm	x
Delta base plate, 100 x 150 mm	x
3 x sanding sheet C470, Best for Wood + Paint, 120	Delta, 113 x 101mm, 80 x 130mm
1 x Hole Punch	x
1 x Dust bag	x



Random Orbital Sander

Battery not included



Technical data	GEX 12V-125
Part number	0 601 372 141
Pad Diameter	125 mm
No-load Speed	6,000 – 10,000 min-1
Orbital Stroke Rate	12,000 – 20,000 min-1
Orbit	2.5 mm
Comes complete with	
1 x sanding sheet C430, P120	x
1 x dust bag	x



MEASURING TOOLS

INSPECTION

120mm Wall Detector

Battery not included



Technical data	GMS 120
Part number	0 601 081 000
Max. detection depth	120 mm
Detection materials	metal, live cable, stud
Power supply	1 x 9 V 6LR61
Weight	0.3 kg
Comes complete with	
Pouch, hand strap, 1 x 9V battery	

120mm Stud Finder

Battery not included



Technical data	D-Tect 120
Part number	0 601 081 3K0
Max. detection depth	120 mm
Detection materials	stud, metal, cable, water-filled pipes
Power supply	4 x 1.5V LR6 (AA) / 12 V Li-ion / 10.8 V Li-ion
Weight	0.5 kg
Comes complete with	
Carrying bag, 4 x AA battery	

400°C Thermo Detector

Battery not included



Technical data	GTC 400 C
Part number	0 601 083 150
Measurement range	-10°C to +400°C
Measuring accuracy of IR	±3.0 °C
No. of measuring points	19,200
Field of view	53 x 43°
Power supply	4 x 1.5V LR6 (AA) / 12V Li-ion / 10.8V Li-ion
Weight	0.5 kg
Comes complete with	
Carrying bag, AA 1, hand strap, micro-USB cable, 4 x AA battery	

600°C Thermo Detector

Battery not included



Technical data	GTC 600 C
Part number	0 601 083 5K1
Measurement range	-20 °C to +600°C
Measuring accuracy of IR	± 2.0°C^ (0 to 100°C)
No. of measuring points	49,152
Field of view	45 x 35°
Power supply	12V Li-ion / 10.8V Li-ion
Weight	0.5 kg
Comes complete with	
Carrying bag, USB-C cable	

1.5m 4.3" Inspection Camera

Battery not included



NEW!

Technical data	GIC 4-23 C
Part number	0 601 241 5K0
Length of camera cable	150 cm
Display size	4.3"
Display resolution	800 x 480 px
Camera Resolution	1280 x 720 px
Focus Distance	30-80 mm
Diameter Camera	8.3 mm
Power supply	4 x 1.5V LR6 (AA) / 12V Li-ion / 10.8V Li-ion
Robustness of the cable	IP67, 30 mins immersion time (diesel, engine oil, ethyl alcohol, petrol or salt water (26.5 % salt content))
Comes complete with	
Camera Cable, 4 x Alkaline Batteries, AA1 adapter, USB-C cable, hook, mirror, magnet pouch	

1.5m 5" Inspection Camera

Battery not included



NEW!

Technical data	GIC 5-27 C
Part number	0 601 241 4K0
Length of camera cable	150 cm
Display size	5"
Display resolution	1280 x 720 px
Camera Resolution	1280 x 720 px
Focus Distance	30-80 mm
Diameter Camera	8.3 mm
Power supply	4 x 1.5V LR6 (AA) / 12V Li-ion / 10.8V Li-ion
Robustness of the cable	IP67, 30 mins immersion time (diesel, engine oil, ethyl alcohol, petrol or salt water (26.5 % salt content))
Comes complete with	
Camera Cable, 4 x Alkaline Batteries, AA1 Adapter, USB-C Cable Micro SD card 32GB, Hook, Mirror, Magnet Pouch	

MEASURING TOOLS

DETECTION

200mm Wall Detector

Battery not included



Technical data	D-Tect 200 C
Part number	0 601 081 6K0
Max. detection depth	200 mm
Detection materials	metal, cable, plastic pipe, stud
Power supply	4 x 1.5V LR6 (AA) / 12V Li-ion / 10.8V Li-ion
Weight	0.6 kg
Comes complete with	
Carrying bag, AA 1, handstrap, USB-C cable, 4 x AA battery	

1000°C Thermo Detector

Battery not included



Technical data	GIS 1000 C
Part number	0 601 083 3K1
Measurement range	-40°C to +1000°C
Measuring accuracy of IR	±1.0°C
Working range	0.1 – 5 m
Data transfer	MicroUSB, Bluetooth™ Smart
Comes complete with	
Carrying bag, micro-USB cable, 4 x AA battery	

BOSCH THERMAL APP

MEASURE TEMPERATURES AND SEND THEM TO YOUR SMARTPHONE

iOS

Android

MEASURING TOOLS

RANGEFINDERS

30M Laser Measure



Technical data	GLM 30-23
Part number	0 601 072 XK0
Laser Class	2
Measuring Range	0.05 – 30 m
Measuring Accuracy	± 1.5 mm [^]
Unit of measurement	metre, centimetre, feet, inch, ft-inch, TW ft
Power Supply	2 x 1.5V LR06 (AA)
Weight	0.1 kg
Comes complete with	
2 x 1.5V LR06 (AA)	

40m Laser Measure



Technical data	GLM 40
Part number	0 601 072 980
Laser Class	2
Measuring Range	0.15 – 40 m
Measuring Accuracy	± 2.0 mm [^]
Unit of measurement	metre, feet
Power Supply	2 x 1.5V LR03 (AAA)
Weight	0.1 kg
Comes complete with	
2 x 1.5V LR03 (AAA)	

40m Laser Measure



Technical data	GLM 400
Part number	0 601 063 072 RK0
Laser Class	2
Measuring Range	0.05 – 40 m
Measuring Accuracy	± 1.5 mm [^]
Unit of measurement	metre, centimetre, feet, inch
Power Supply	2 x 1.5V LR03 (AAA)
Weight	0.1 kg
Comes complete with	
2 x 1.5V LR03 (AAA)	

50M Laser Measure



Technical data	GLM 50-23 G	GLM 50-27 CG
Part number	0 601 072 VK0	0 601 072 UK0
Bluetooth connectivity	No	Yes
Laser Class	2	
Measuring Range	0.05 – 50 m	
Measuring Accuracy	± 1.5 mm [^]	
Incline Measurement	0 – 360° (4 x 90°)	
Unit of measurement	metre, centimetre, feet, inch	
Power Supply	2 x 1.5V LR06 (AA) / 3.7V 1.0Ah rechargeable battery	
Weight	0.2 kg	
Comes complete with		
2 x 1.5V LR06 (AA)		

100M Laser Measure



Technical data	GLM 100-25 C
Part number	0 601 072 YK0
Laser Class	2
Measuring Range	0.08 – 100 m
Measuring Accuracy	± 1.5 mm [^]
Incline Measurement	0 – 360° (4 x 90°)
Unit of measurement	metre, centimetre, feet, inch
Power Supply	3 x 1.5V LR06 (AA)
Weight	0.2 kg
Comes complete with	
3 x 1.5V LR06 (AA), pouch	

150M Laser Measure



Technical data	GLM 150 C
Part number	0 601 072 FK0
Laser Class	2
Measuring Range	0.08 – 150 m
Measuring Accuracy	± 1.5 mm [^]
Incline Measurement	0 – 360° (4 x 90°)
Unit of measurement	metre, centimetre, feet, inch
Power Supply	3 x 1.5V LR06 (AA)
Weight	0.2 kg
Comes complete with	
3 x 1.5V LR06 (AA), pouch, hand strap	



Features							150m
Integrated camera						✓	✓
Indirect distance measurement/Pythagoras		✓	✓	✓	✓	✓	✓
Digital level function				✓	✓	✓	✓
Corner measuring pin						✓	✓
Continuous/Area/Volume measurement	Continuous	✓	✓	✓	✓	✓	✓
Bluetooth connectivity					✓	✓	✓
IP Rating	IP54	IP54	IP54	IP65	IP56	IP54	IP54
Memory	30m N/A	40m 10	40m 15	50m 30	50m 30	100m 30	150m 30
Typical measuring accuracy	± 1.5mm	± 2mm	± 1.5mm	± 1.5mm	± 1.5mm	± 1mm	± 1.5mm
Range							
	GLM 30-23	GLM 40	GLM 400	GLM 50-23 G	GLM 50-27 CG	GLM 100-25 C	GLM 150 C

MEASURING TOOLS

LASERS

3-Point Laser

Battery not included



Technical data	GPL 3 G
Part number	0 601 066 N00
Laser class	2
Projection	3 points
Working range	up to 30 metres
Accuracy	$\pm 0.35 \text{ mm/m}^\wedge$; $\pm 0.7 \text{ mm/m}^\wedge$ (bottom point)
Self-levelling range	$\pm 4^\circ$
Comes complete with	

2 x 1.5V LR6 battery (AA), pouch

5-Point Laser

Battery not included



Technical data	GPL 5 G
Part number	0 601 066 P00
Laser class	2
Projection	5 points
Working range	up to 30 metres
Accuracy	$\pm 0.35 \text{ mm/m}^\wedge$; $\pm 0.7 \text{ mm/m}^\wedge$ (bottom point)
Self-levelling range	$\pm 4^\circ$
Comes complete with	

2 x 1.5V LR6 battery (AA), pouch

50m Green Beam Combi Laser

Battery not included



Technical data	GCL 2-15 G
Part number	0 601 066 J00
Laser class	2
Projection	2 lines, 2 points
Working range	up to 15 m (line); 10 m (point)
Accuracy	$\pm 0.3 \text{ mm/m}^\wedge$ (line); $\pm 0.7 \text{ mm/m}^\wedge$ (point)
Self-levelling range	$\pm 4^\circ$
Comes complete with	

Carrying case, pouch, RM 1, ceiling clamp, target plate, 3 x AA battery

50m Green Beam Combi Laser

Battery not included



Technical data	GCL 2-50 CG
Part number	0 601 066 H00
Laser class	2
Projection	2 lines, 2 points
Working range	up to 50 m (line); 10 m (point)
Accuracy	$\pm 0.3 \text{ mm/m}^\wedge$ (line); $\pm 0.7 \text{ mm/m}^\wedge$ (point)
Self-levelling range	$\pm 4^\circ$
Comes complete with	

Carrying case, pouch, RM 2, target plate, AA1, 4 x AA battery

BOSCH LEVELLING REMOTE APP

CONTROLLING OF COMBI AND LINE LASERS VIA SMARTPHONE

MEASURING TOOLS

LASERS

3-Line Point Laser

Battery not included



Technical data	GLL 3-15 X
Part number	0 601 063 M80
Laser class	2
Projection	3 lines, 1 point
Working range	up to 15 m (line); 5 m (point)
Accuracy (Point / Horizontal / Vertical)	$\pm 0.2^\circ$ mm/m [^] / $\pm 0.7^\circ$ mm/m [^] / $\pm 0.3^\circ$ mm/m [^]
Self-levelling range	$\pm 3^\circ$
Comes complete with	
Carrying bag, 4 x 1.5V LR6 battery (AA)	

5-Line Point Laser

Battery not included



Technical data	GLL 5-50 X
Part number	0 601 063 N80
Laser class	2
Projection	5 lines, 1 point
Working range	up to 50 m (line); 5 m (point)
Accuracy (Point / Horizontal / Vertical)	$\pm 0.2^\circ$ mm/m [^] / $\pm 0.7^\circ$ mm/m [^] / $\pm 0.3^\circ$ mm/m [^]
Self-levelling range	$\pm 3^\circ$
Comes complete with	
Carrying bag, 4 x 1.5V LR6 battery (AA)	

120m Red Beam 3 x 360° Line Laser

Battery not included



Technical data	GLL 3-80
Part number	0 601 063 S00
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy (Point / Horizontal / Vertical)	$\pm 0.3^\circ$ mm/m [^]
Self-levelling range	$\pm 4^\circ$
Comes complete with	
Carrying case, pouch, laser target plate, 4 x 1.5V LR6 battery (AA)	

120m Green Beam 3 x 360° Line Laser

Battery not included



Technical data	GLL 3-80 CG
Part number	0 601 063 U80
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy (Point / Horizontal / Vertical)	$\pm 0.2^\circ$ mm/m [^]
Self-levelling range	$\pm 4^\circ$
Comes complete with	
Carrying case, Universal Holder BM 1 Professional, Ceiling plate, Pouch, Laser target plate, AA1 alkaline battery adapter, 4 x 1.5V LR6 battery (AA)	



DUAL SLOPE
 APP
 LEVELING REMOTE
 2.5mm/min
 80/120mm/360°
 SELF LEVELING
 SHOCK WARNING
 PHOTOBEAM

Comes complete with
LR 60 laser receiver w/ RB 60 bracket
RC 6 remote control
WM 6 wall mount
GAL 18V-40 battery charger
1 x 18V 4.0AH Battery
BA 1 battery adapter
4x D batteries, 4x AA batteries
Red laser glasses
Red target plate
Tripod carrying straps
Carrying case



Tool & Battery Guarantee*



Bluetooth®-connection
paired with Levelling Remote
App offers remote-control
adjustment of the tool via a
smartphone.



Suitable for an even wider range of applications using the digital dial-in of grade (X and/or Y).



Thanks to the simple calibration instructions via the Bosch Levelling Remote App, calibrate the tool yourself, conveniently, step-by-step.



High quality, IP67 rated receiver with 125mm reception area, dual sided display and offset feature in mm and inches.



Large backlit display for optimum overview and simple operation.



For a 2m tripod-
tipover rating



For added flexibility with either D-Cell Alkaline or Bosch Li compatible batteries.



IP68 dust tight and waterproof including the battery compartment

MEASURING TOOLS

ROTATING LASERS

300m Rotation Laser

Battery not included



Technical data	GRL 300 HVG
Part number	0 601 061 703
Laser class	3R
Working range	up to 300 m (diameter)
Accuracy	$\pm 0.1 \text{ mm/m}^\wedge$
Self-levelling range	$\pm 5^\circ$
Power supply	2 x 1.5V LR20 (D)
Comes complete with	
Carrying case, LR 1G, RC 1, WM 4, Bracket, Target plate, Laser viewing glasses, 2x D battery, 1x 9V battery, 1x AA battery	

350m Rotation Laser

Battery not included



Technical data	GRL 350 HV
Part number	0 601 061 S40
Laser class	3R
Working range	up to 350 m (diameter)
Accuracy (horizontal / vertical)	$\pm 0.5 \text{ mm/m}^\wedge / \pm 0.1 \text{ mm/m}^\wedge$
Self-levelling range	$\pm 5^\circ$
Power supply	2 x 1.5V LR20 (D)
Comes complete with	
Carrying case, LR 30, RB 30, WM 24, Target plate, Laser viewing glasses, 2x D battery, 1x 9 V battery	

100m Optical Level

Battery not included



Technical data	GOL 26 D
Part number	0 601 068 800
Magnification	26 x
Working range	100 m
Accuracy	$\pm 1.6 \text{ mm at } 30 \text{ m}$
Weight	1.5 kg
Comes complete with	
Carrying case, adjusting pin, hex key, lens cover, plumb bob	

120m Optical Level

Battery not included



Technical data	GOL 32 D
Part number	0 601 068 500
Display size	3.5"
Display resolution	320 x 240 px
Diameter of camera head	8,5 mm
Length of camera cable	120 cm
Comes complete with	
Carrying case, adjusting pin, hex key, lens cover, plumb bob	

Lightweight Measuring Wheel

Battery not included



Technical data	GWM 32
Part number	0 601 074 000
Wheel diameter	308.5 mm
Max. measured value	9999.9 m
Measuring Accuracy	$\pm 1 \text{ cm} / 100 \text{ m}$
Weight	1.4 kg
Comes complete with	
Protective bag	

Robust Measuring Wheel

Battery not included



Technical data	GWM 40
Part number	0 601 074 100
Wheel diameter	389.1 mm
Max. measured value	9999.9 m
Measuring Accuracy	$\pm 5 \text{ cm} / 100 \text{ m}$
Weight	3.3 kg
Comes complete with	
Protective bag	

MEASURING TOOLS

LEVELS

60cm Digital Inclinator



Technical data	GIM 60
Part number	0 601 076 700
Length	60 cm
Measuring Range	0 – 360° (4 x 90°)
Measuring Accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Power Supply	4 x 1.5V LR6 (AA)
Weight	0.8 kg
Comes complete with	
Protective bag, 4 x AA battery	

60cm Laser Inclinator



Technical data	GIM 60 L
Part number	0 601 076 900
Length	60 cm
Measuring Range	0 – 360° (4 x 90°)
Measuring Accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Laser range	30 cm
Power Supply	4 x 1.5V LR6 (AA)
Weight	0.9 kg
Comes complete with	
Protective bag, 4 x AA battery	

120° Digital Inclinator



Technical data	GIM 120
Part number	0 601 076 700
Length	120 cm
Measuring Range	0 – 360° (4 x 90°)
Measuring Accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Power Supply	4 x 1.5V LR6 (AA)
Weight	1.4 kg
Comes complete with	
Protective bag, 4 x AA battery	



220° Mitre Angle Mesurer

Battery not included



Technical data	GAM 220 MF
Part number	0 601 076 600
Arm length	40 cm
Measuring Range	0 - 220°
Measuring Accuracy	± 0.1°
Power Supply	4 x 1.5V LR6 (AA)
Weight	1.2 kg
Comes complete with	
Protective bag, leg extension, 4 x AA battery	

270° Laser Angle Mesurer

Battery not included



Technical data	GAM 270 MFL
Part number	0 601 076 400
Laser Class	2
Arm length	60 cm
Measuring Range	0 - 270°
Measuring Accuracy	± 0.1°
Laser Range	30 m
Power Supply	4 x 1.5V LR6 (AA)
Weight	1.2 kg
Comes complete with	
Protective bag, leg extension, 4 x AA battery	

3.6V CORDLESS SCREWDRIVER

BOSCH GO

0 601 9H2 140

Technical data

Part number	0 601 9H2 140
Torque	5 Nm
Torque settings	5
No load speed	360 rpm
Bit holder	1/4" internal hex

Comes complete with

33-piece screwdriver bit set (1 600 A01 39X)	x
Carrying case	x
Micro USB cable (1 607 000 CG9)	x



Forward or reverse makes all jobs easier.



Push to screw in or out, or use the side button.



Tool stops immediately after deactivation.



Adjust torque for precise drilling adjustments

33 bit accessory set included.



STORAGE SOLUTIONS

Use the system that's ideal for your workshop, for transport and for the job site.

Make your tools even more mobile – this intelligent transport and storage system is perfectly tailored to the needs of PROs.

INLAYS



1/2 inlays (L-BOXX 136)

GSB 18V (1 600 A00 2WB)
GSR/B-VE/GSB/GSR/GSR HX18V-LI
(6 082 850 4VZ)

Suits L-BOXX 136

Impact Wrench GDR / GDS 18V-LI (6 082 850 4K2)
Angle Grinder GWS 18V-LI (6 082 850 4HB)
Rotary Hammer GBH EC 18V-LI (6 082 850 4X9)
Impact Drill GSB 19/ 21-2 (6 082 850 4HP)
Rotary Hammer GBH 2-18/20/22/23/26 (6 082 850 4HM)
Jigsaw GST 135/150 (6 082 850 4HR)
Angle Grinder GWS 7/8/10/11/14-125 (6 082 850 4HN)

Full inlays

Suit L-BOXX 238

Circular Saw GKS 18V-LI
(6 082 850 4H9)
Reciprocating Saw GSA 18V-LI
(6 082 850 4HA)

BASIC ELEMENTS

NEW!



L-BOXX

102 mm (1 600 A01 2FZ)
136 mm (1 600 A01 2G0)
238 mm (1 600 A01 2G2)
374 mm (1 600 A01 2G3)



i-BOXX shelf 3 pcs
(3x shelf + lid)
(1 600 A00 1SF)

TOOL BAGS



Single 12V Bag
1 600 A00 3BG



Single 18V Bag
1 600 A00 3BH



Medium Tool Bag
1 600 A00 3BJ



Large Tool Bag
1 600 A00 3BK



FLEXIBLE INLAY

for individual use

136 mm
(1 600 A00 1S1)

TRANSPORTATION



L-BOXX Roller
(1 600 A00 1S9)



Aluminium caddy
(1 600 A00 1SA)



LS-BOXX
306 mm (1 600 A00 1RU)



L-CASE
(stackable on L-Boxx,
but not connectable)



Toolbox
fits L-BOXX 238/374
(6 082 850 50A)



LT-BOXX
272 mm
(1 600 A00 223)



Full flexibility

SMALL ITEMS STORAGE



L-BOXX Organisier
6 082 850 4HT



Tray
72 mm (1 600 A00 1SD)



i-BOXX + inset boxes
53 mm (1 600 A00 1S7)



L-BOXX Mini
for i-BOXX 72 mm
(1 600 A00 7SF)

NOTES

6 YEARS

**Tool & Battery
Guarantee***

*With online registration

XLOCK

BITURBO
BRUSHLESS

Pro **CORE** 18V

BULLDOG

NOTES

6 YEARS

**Tool & Battery
Guarantee***

*With online registration

XLOCK

BITURBO
BRUSHLESS

Pro **CORE** 18V

BULLDOG

SPARE PARTS

AUSTRALIA

THE BOSCH ONLINE SPARE PARTS SHOP (AU ONLY): 24-HOUR SPARE PART ORDERING FOR YOUR POWER TOOLS


Precise, safe and reliable:

- Bosch offers the spare parts for your tools (such as angle grinders or drills):
From the armature to carbon brushes.
- Order your original spare parts from our online shop and your order will be expressed shipped right to your door!
- The repair of power tools must be carried out by a competent person

The benefits for you:

- Spare parts are easy to select via an exploded drawing
- Fast delivery thanks to the high availability of spare parts
- Direct access to genuine Bosch spare parts

Ordering your spare part is easy:

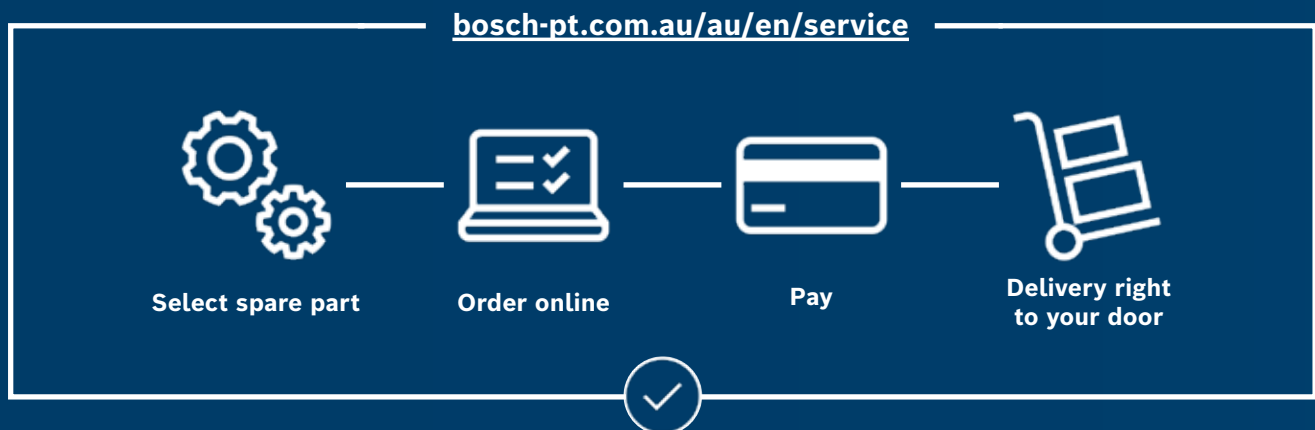

Find your local Australian service dealer at:

- bosch-pt.com.au/au/en/dl/dealerlocator/dealersearch/

NEW ZEALAND

Search for the right spare part at:

- boschtoolservice.com/nz/en/boschprof/spareparts/search

Find your local New Zealand service dealer at:

- bosch-pt.co.nz/nz/en/dl/dealerlocator/dealersearch/

Find answers to frequently asked questions at:

- bosch-pt.co.nz/nz/en/service/after-sales-service/faq/

6 YEARS

Tool & Battery Guarantee*

*With online registration

www.bosch-professional.com/guarantee



REGISTRATION

Create a user account once and register your devices there by stating the product number, serial number and purchase date



CERTIFICATE

After your registration you'll receive and certificate to confirm that your tool's warranty is now valid



Simply register your power tool, measuring tool, battery or charger online within 4 weeks of purchase and extend your warranty to 6 years!

REGISTER FOR YOUR 6 YEAR TOOL & BATTERY WARRANTY

www.bosch-professional.com/guarantee

**FOR EXCLUSIVE NEWS AND DEALS
JOIN THE BLUE CREW**

boschbluecrew.com.au

**REGISTER FOR YOUR 6 YEAR TOOL &
BATTERY WARRANTY**

www.bosch-professional.com/guarantee



KRD 05/24 RB4816PB

6 YEARS

**Tool & Battery
Guarantee***

*With online registration

Robert Bosch (Australia) Pty. Ltd.

1555 Centre Road
Clayton, VIC 3168
PH: +61 3 9541 5555
bosch-pt.com.au/au/en/

Robert Bosch (New Zealand) Pty. Ltd.

PO Box 13324
Onewunga, Auckland 1643
PH: 0800 543 353
bosch-pt.co.nz/nz/en/

Find a digital version of this catalogue on our website.

No liability is accepted for printing errors.

Subject to technical alterations.

1619M00Z3A



@BOSCHTOOLSANZ